

FIG 1

(a) IPShuttle <-----> IPRelay <----- PBX/KTS
call dial tone
established

(b) IPShuttle <-----> IPRelay <-----> PBX/KTS
press hookflash
and then #

(c) IPShuttle -----> IPRelay <-----> PBX/KTS
control message
via audio channel

(d) IPShuttle <-----> IPRelay -----> PBX/KTS
hookflash

hookflash = onhook for 200ms and then offhook again

(e) IPShuttle -----> IPRelay -----> PBX/KTS
user enters
PBX/KTS access codes

FIG 2

005739082 121500

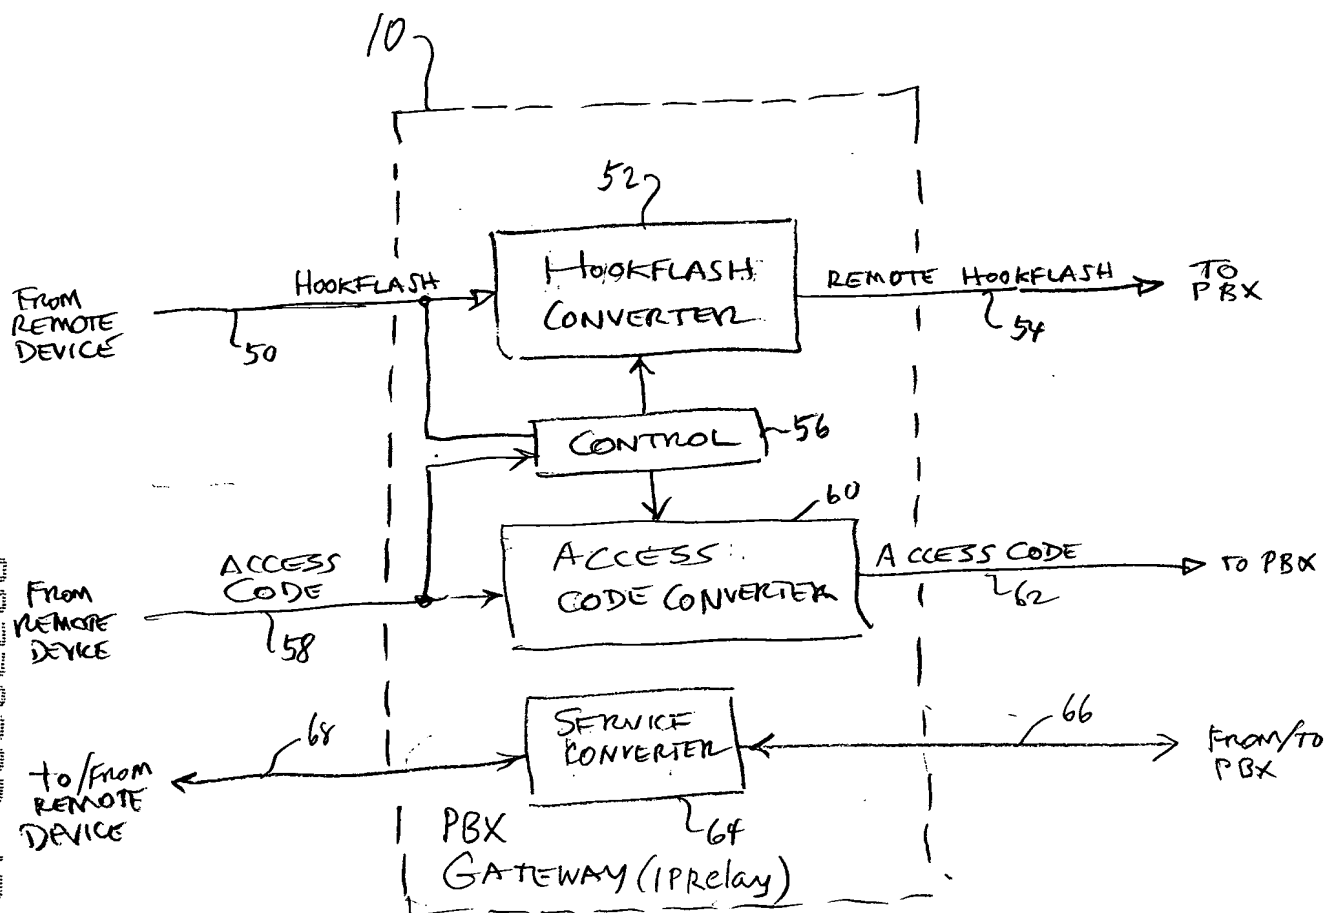


FIG 3